


# LDX™ Series Hose Reels

The Ultimate Industrial-Grade Hose Reel



## High-Quality Construction, Consistent Performance

Designed with an all-metal frame and specially crafted components; Graco LDX hose reels ensure smooth release and retraction to optimize confidence in cost-conscious smaller garages, independent repair facilities and industrial manufacturing environments.

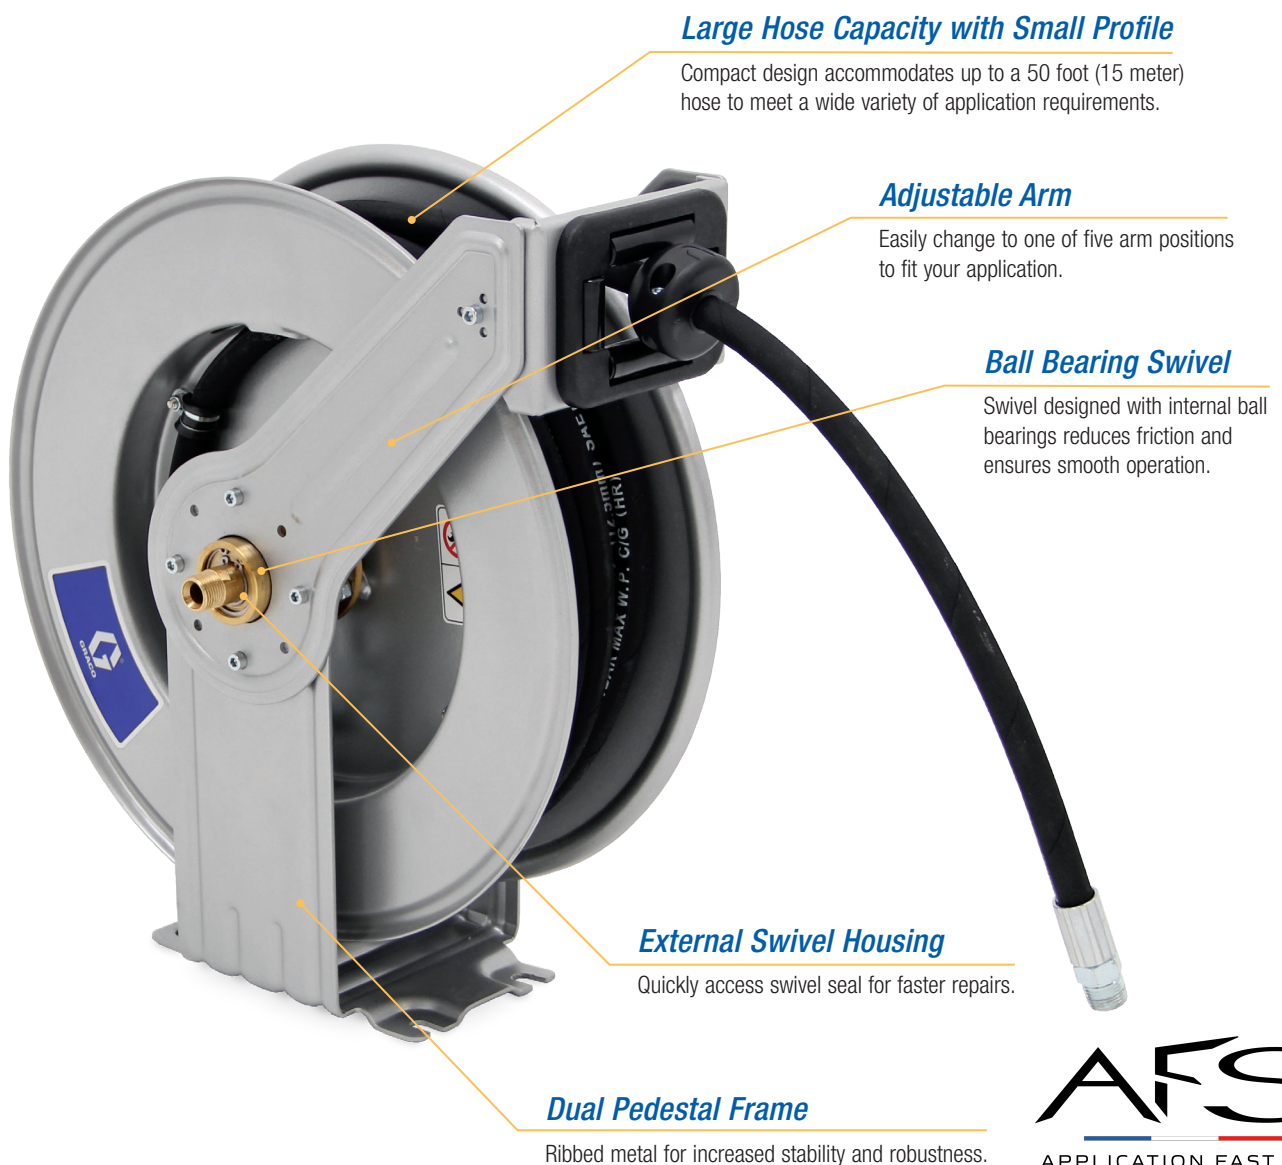

### *Large Hose Capacity with Small Profile*

Compact design accommodates up to a 50 foot (15 meter) hose to meet a wide variety of application requirements.

### *Adjustable Arm*

Easily change to one of five arm positions to fit your application.

### *Ball Bearing Swivel*

Swivel designed with internal ball bearings reduces friction and ensures smooth operation.

### *External Swivel Housing*

Quickly access swivel seal for faster repairs.

### *Dual Pedestal Frame*

Ribbed metal for increased stability and robustness.

**AFS**  
APPLICATION FAST SET

PROVEN QUALITY. LEADING TECHNOLOGY.

## Typical Applications

- Industrial manufacturing facilities
- Small maintenance shops
- Tire maintenance shops
- Small fast lubes
- Independent repair facilities

## Typical Fluids Handled

- Petroleum- and synthetic-based oils (motor, gear and ATF)
- Air
- Water
- Grease
- Antifreeze
- Windshield washer fluid
- Diesel exhaust fluid (DEF)

## Technical Specifications

### Operating Temperature Range


Air/Water/Antifreeze/Windshield Washer Fluid	14.5°F to 149°F (-26°C to 65°C)
DEF	-40°F to 158°F (-40°C to 70°C)
Oil	-40°F to 212°F (-40°C to 100°C)
Grease	-40°F to 212°F (-40°C to 100°C)

### Wetted Parts


Air/Water/Antifreeze/Windshield Washer Fluid Reels	EPDM, stainless steel, fluorocarbon (FKM)
DEF Reels	Hybrid polymer, brass, nitrile rubber
Oil Reels	Zinc-plated steel, brass, polyurethane, nitrile rubber
Grease Reels	Zinc-plated steel, brass, nitrile rubber
Sound Pressure Level	80 dB(A)
Sound Power Level	87 dB(A)
Instruction Manual	3A8216

## Dimensions

A	3.5 in (89 mm)
B	7.5 in (191 mm)
C	4.9 in (125 mm)
D	8.7 in (221 mm)
E	19.0 in (483 mm)
F	9.4 in (239 mm)
G	17.5 in (445 mm)



## Typical Mounting Configurations




**Ceiling Mount**



**Wall Mount**

**Bench Mount**



## Ordering Information

### LDX Reels

Part Number	Fluid	Hose		Connection Size		Maximum Pressure PSI
		ID (in)	Length (ft)	Inlet (in)	Outlet (in)	
HEL010	Air/Water/Antifreeze/Windshield Washer Fluid	3/8	50	3/8 NPT	3/8 NPT	300
HEL012	Air/Water/Antifreeze/Windshield Washer Fluid	3/8	50	3/8 NPT	1/4 NPT	300
HEL015	DEF	1/2	45	1/2 BSPT	1/2 BSPT	150
HEM004	Oil	1/2	50	1/2 NPT	1/2 NPT	1,500
HEH006	Grease	3/8	50	3/8 NPT	3/8 NPT	4,060

### Inlet Kits

Part Number	Fluid
25U369	Air/Water/Antifreeze/Windshield Washer Fluid
25U370	DEF
25U371	Oil
25U372	Grease

**Contact us today!**

Call **800-533-9655** to speak with a Graco representative, or visit **[www.graco.com](http://www.graco.com)** for more information.





## APPLICATION FAST SET

483 Avenue Lazare Ponticelli  
77220 Gretz-Armainvilliers  
Tel : 01 64 16 41 63 - Fax : 01 64 16 48 67  
[contact@afs-bicomposant.fr](mailto:contact@afs-bicomposant.fr)  
[www.afs-bicomposant.fr](http://www.afs-bicomposant.fr)