

GENUINE GRACO PARTS AND ACCESSORIES

248969 Cleanout Tool Kit



For the **FUSION** Plural Component, Impingement Mix Air Purge Spray Gun



Read warnings and instructions.
Refer to manual 309550.

407407A



Do not drill into metal during cleanout operation.


Use N Methyl Pyrrolidone (NMP), Dynasolve CU-6, Dzolv, or equivalent to soften cured material.

CAUTION

These solvents are not recommended for flushing.

Passage Description	Ref. Letter	Diameter, in. (mm)
Optional Air Inlet, Air Valve Bore	C	7/16, 1/8 (11.0, 3.1)
Purge Air	D	1/8 (3.1)
Piston Air	E	1/8 (3.1)
Air Exhaust, Optional Air Inlet	F	11/32, 1/8 (8.7, 3.1)
Air Valve Bore	H	9/32 (7.1)
Cleanoff Air Inlet	K	3/32 (2.35)
Check Valve Holes	L	3/32 (2.35)
Grease Port	M	3/32 (2.35)
Cleanoff Air Exit	N	3/32 (2.35)

E
Drill will stop short of passing through.

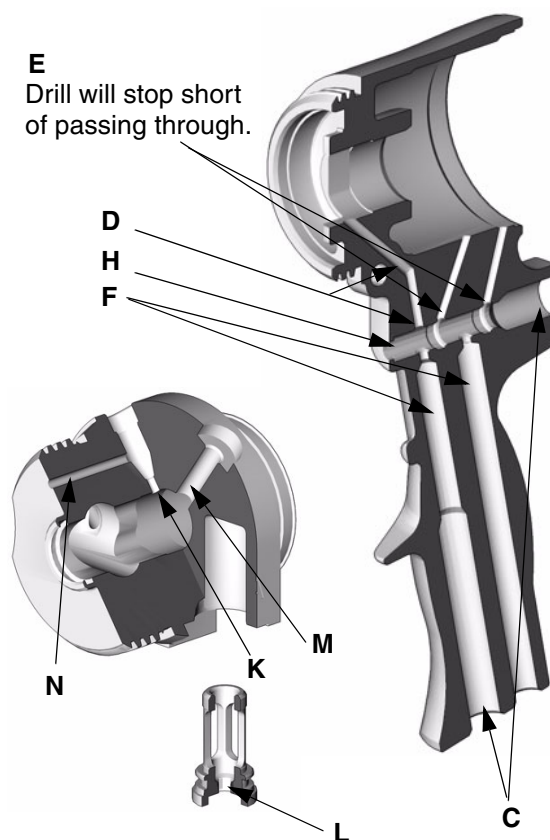

Graco Inc. P.O. Box 1441 Minneapolis, MN 55440-1441
307707 Rev. A 08/2004 Printed in USA
Copyright 2004, Graco Inc. is registered to I.S. EN ISO 9001

APPLICATION FAST SET

483 Avenue Lazare Ponticelli
77220 Gretz-Armainvilliers
Tel : 01 64 16 41 63 - Fax : 01 64 16 48 67
contact@afs-bicomposant.fr
www.afs-bicomposant.fr