

# Repair Parts for XP Xtreme<sup>™</sup> 97cc Lower

406993D

ΕN



**Important Safety Instructions** 

Read all warnings and instructions in manual 311762. Save those instructions.


### 25D256 Full Repair Kit Graco Formulated UHMWPE/PTFE

Chemical Resistance and Durability in Applications below 140° F (60° C)

#### **Bulk Pack Replacement Parts**

Ref.	Part	Description	Qty.
103*		THROAT PACKINGS	1
104*		PISTON PACKINGS	1
109*	288067	O-RING, PTFE, top cylinder	1
		(10/pack)	
112*		BALL, piston, (3/pack)	1
116*	244899	BALL, inlet, (3/pack)	1
117	288064	SHIM, inlet, ball guide	2
		(9/pack)	
119*	247393	PLUG, throat seal (10/pack)	1
122*	244895	O-RING, filter; thin, PTFE	1
		(10/pack)	
123	224458	STRAINER, 30 mesh screen	1
		(2/pack)	
	238436	STRAINER, 30 mesh screen	1
		(25/pack)	
125*	262484	O-RING, filter; medium,	1
		PTFE (10/pack)	
127*	288068	O-RING, foot valve; PTFE	2
		(10/pack)	
132*	262512	O-RING, PTFE; cartridge and	2
		cylinder bottom	
143*	124007		1
159*	262483	O-RING, filter, thick; PTFE	1
		(10 pack)	

<sup>\*</sup> Included in Full Repair Kits.

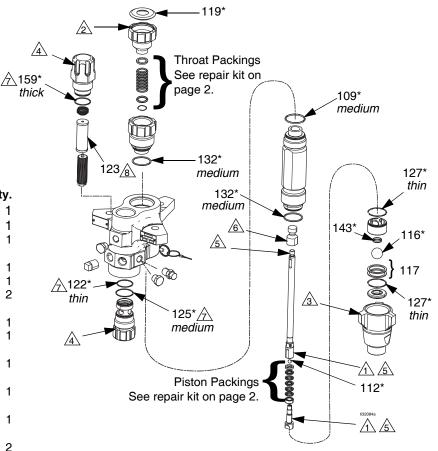

↑ Torque to 85 ft-lb (115 N•m).

^ Torque to 75 ft-lb (101 N•m).

③ Torque to 135-150 ft-lb (183-203 N•m).

4 Torque to 40-60 ft-lb (52-82 N•m).

Apply lubricant to threads before assembly.

⚠ Torque to 30-40 ft-lb (40-54 N•m).


🛆 Lubricate.

Pumps with short filters can be upgraded with kit 24F975.

### Full Repair Kit - Graco Formulated UHMWPE/PTFE - 25D256\*

\*Includes items shown on front page

### Throat Packings: Piston Packings: Lips Face Up

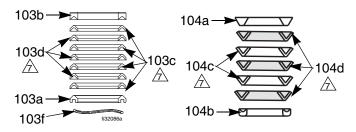

A Lubricate packings.

## Throat Seal Repair Kit - Graco Formulated UHMWPE/PTFE - 25D173

#### Includes:

Ref.	Description	Qty.
103a	GLAND, male, throat	1
103b	GLAND, female, throat	1
103c	V-PACKING, UHMWPE, throat (red)	4
103d	V-PACKING, PTFE, throat (white)	3
103f	WAVE SPRING	1

## Piston Seal Repair Kit - Graco Formulated UHMWPE/PTFE - 25D187

#### Includes:

Ref.	Description	Qty.
104a	GLAND, male, piston	1
104b	GLAND, female, piston	1
104c	V-PACKING, PTFE, piston (white)	2
104d	V-PACKING, UHMWPE, piston (red)	3

All written and visual data contained in this document reflects the latest product information available at the time of publication.

Graco reserves the right to make changes at any time without notice.

For patent information, see www.graco.com/patents.

Original instructions. This manual contains English. MM 406993

Graco Headquarters: Minneapolis International Offices: Belgium, China, Japan, Korea

GRACO INC. AND SUBSIDIARIES • P.O. BOX 1441 • MINNEAPOLIS MN 55440-1441 • USA Copyright 2012, Graco Inc. All Graco manufacturing locations are registered to ISO 9001.

www.graco.com
Revision D, September 2018

#### - APPLICATION FAST SET -

483 Avenue Lazare Ponticelli 77220 Gretz-Armainvilliers Tel: 01 64 16 41 63 - Fax: 01 64 16 48 67 contact@afs-bicomposant.fr www.afs-bicomposant.fr