

# Repair Parts for XP Xtreme<sup>™</sup> 90cc Lower

406992D

FΝ



#### **Important Safety Instructions**

Read all warnings and instructions in manual 311762. Save those instructions.


# Complete Repair Kit 25D255 Graco Formulated UHMWPE/PTFE

(Chemical Resistance and Durability)

### **Bulk Pack Replacement Parts**

Ref.	Part	Description	Qty.
103*		THROAT PACKINGS	1
104*		PISTON PACKINGS	1
109*	288067	O-RING, PTFE, top cylinder	1
		(10/pack)	
112*	288065	BALL, piston, (3/pack)	1
116*	244899	BALL, inlet, (3/pack)	1
117	288064	SHIM, inlet, ball guide	2
		(9/pack)	
119*	247393	PLUG, throat seal (10/pack)	1
122*	244895	O-RING, filter; thin, PTFE	1
		(10/pack)	
123	224458	STRAINER, 30 mesh screen	1
		(2/pack)	
	238436	STRAINER, 30 mesh screen	1
		(25/pack)	
125*	262484	O-RING, filter; medium,	1
		PTFE (10/pack)	
127*	288068	O-RING, foot valve; PTFE	2
		(10/pack)	
132*	262512	O-RING, PTFE; cartridge and	2
		cylinder bottom	
143*	124007	SPRING, foot valve	1
159*	262483	O-RING, filter, thick; PTFE	1
		(10 pack)	

<sup>\*</sup> Included in Full Repair Kits.

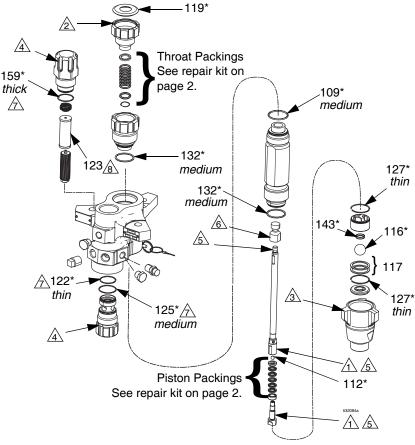

1 Torque to 85 ft-lb (115 N•m).

**2** Torque to 75 ft-lb (101 N•m).

Torque to 135-150 ft-lb (183-203 N•m).

Torque to 40-60 ft-lb (52-82 N•m).

Apply lubricant to threads before assembly.


6 Torque to 30-40 ft-lb (40-54 N•m).

https://www.dubricate.

 $\stackrel{ ext{ }}{ ext{ }}$  Pumps with short filters can be upgraded with kit 24F975.

## Complete Repair Kit 25D255\* Graco Formulated UHMWPE/PTFE

(\*includes items shown on front page)

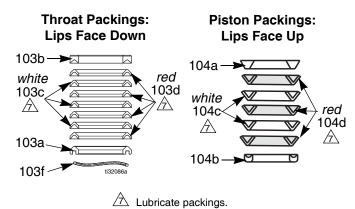

## Throat Seal Repair Kit 25D172 Graco Formulated UHMWPE/PTFE

#### Includes:

Ref.	Description	Qty.
103a	GLAND, male, throat	1
103b	GLAND, female, throat	1
103c	V-PACKING, PTFE, throat (white)	3
103d	V-PACKING, UHMWPE, throat (white)	4
103f	WAVE SPRING	1

## Piston Seal Repair Kit 25D186 Graco Formulated UHMWPE/PTFE

#### Includes:

Ref.	Description	Qty.
104a	GLAND, male, piston	1
104b	GLAND, female, piston	1
104c	V-PACKING, PTFE, piston (white)	2
104d	V-PACKING, UHMWPE, piston (red)	3

All written and visual data contained in this document reflects the latest product information available at the time of publication.

Graco reserves the right to make changes at any time without notice.

For patent information, see www.graco.com/patents.

Original instructions. This manual contains English. MM 406992

Graco Headquarters: Minneapolis International Offices: Belgium, China, Japan, Korea

GRACO INC. AND SUBSIDIARIES • P.O. BOX 1441 • MINNEAPOLIS MN 55440-1441 • USA Copyright 2012, Graco Inc. All Graco manufacturing locations are registered to ISO 9001.

www.graco.com Revision D, September 2018



483 Avenue Lazare Ponticelli 77220 Gretz-Armainvilliers Tel: 01 64 16 41 63 - Fax: 01 64 16 48 67 contact@afs-bicomposant.fr www.afs-bicomposant.fr