

GENUINE GRACO PARTS & ACCESSORIES



# 244841 Lubricator Accessory Kit

For King™ Sprayers


**INFORMATION ENCLOSED**

GRACO INC. / P.O. BOX 1441 / MINNEAPOLIS, MN 55440-1441  
406512 Rev B - December 2017 PRINTED IN U.S.A.

## ⚠ ATTENTION

For detailed instructions and warnings, see manual 309341.

1. Remove filter/regulator from mount bracket.
2. Remove the pin (B) from the outlet of the filter/regulator.
3. Remove regulator cover.
4. Slide the threaded end insert off (13) with outlet fittings still attached.
5. Install the modular connector (2a) (with o-rings and grease provided) between the filter/regulator and the lubricator (L).
6. Install the threaded end insert (13) onto the outlet of the lubricator (L) (with o-ring and grease).
7. Install the three retaining pins (B).

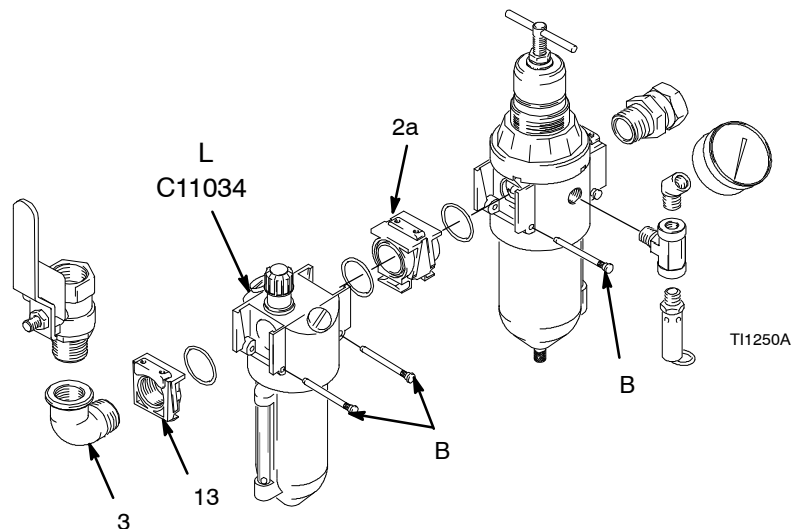

**NOTE:** On light weight cart units only, replace the 3/4" npt pipe extension and the 3/4" npt f x f elbow with the 3/4" npt f x m elbow (3) supplied with kit 244841.



### Application Fast Set

483, Avenue Lazare Ponticelli  
77220 Gretz-Armainvilliers  
Tel : 01 64 16 41 63 ; Fax : 01 64 16 48 67  
[www.afs-bicomposant.fr](http://www.afs-bicomposant.fr)